



Tailwell® Tail Trimmer from Dairy Spares

Dairy Spares Limited
Unit 6, Mullbry Business Park
Shakespeare Way, Whitchurch
Shropshire SY13 1GR

Telephone: 01948 667676
email: info@dairyspares.co.uk
www.dairyspares.co.uk



GGC03A Tailwell Tail Trimmer
Standard Head
Can be resharpened



TTT01T Tailwell Tail Trimmer
Titanium Head
Heavy duty for sand contamination

Tailwell® - The Ultimate Tail Trimming Aid

The Shoof Tailwell is designed to speed up and relieve the tedious and tiresome job of trimming tails of dairy cows. Transform your dairy herd tail trimming routine with Tailwell from Shoof. Designed in New Zealand, Tailwell makes tail trimming quick and easy, reducing the hassle of this essential task.

Tailwell is quick and easy to use, and can effortlessly trim a single tail within ten seconds. Herd tail trimming can be carried out during one regular milking.

The trimmer will fit most power drills, but the best choice is a fairly lightweight 18-volt drill operating at 1200 to 1800rpm. Tailwell has only three moving parts so needs very little maintenance. All steel components are of a high quality stainless steel, so long life is assured.

Trimming dairy cows tails reduces faecal and urine contamination of milk in the vat, improves cleanliness and health of the cow, and improves hygiene and health of milking staff.

The recommended twice yearly tail trimming ensures staff stay safe and milk maintains its highest quality.

- A drive shaft secures the Tailwell power tail trimmer into any suitable cordless drill of 18 volts, operating at 1,200 rpm to 1,800 rpm
- Tailwell is quiet in use, with a smooth, fast cutting action
- Trim tails within a few seconds during milking or in the barn
- An outer blade oscillates over a stationary inner blade, this prevents any risk or injury to the cow
- Pre-cutting the tail's switch is not necessary. Dirty tail-ends feed smoothly over the trimmer

This is a sturdy precision tool that will withstand considerable use.

Replacement cutter sets are available

Tailwell TITANIUM

The Tailwell TITANIUM heavy duty tail trimmer features a longer cutter life – suitable for tails heavily contaminated with sand thanks to the titanium-nitride (TiN) coating. This super-hard coating prevents early wear and tear that sand causes on the cutters. Titanium-coated cutter sets have a unique gold colour.

Benefits of Tailwell TITANIUM include:

- Good cutter life in situations of sand contaminated tails
- A super-hard coating prevents the early wear and tear that the sand causes, therefore extending the life of the cutters
- Trim tails within seconds during milking or in the barn
- Cutters will last up to 3,000 sand-embedded tails (or about 6,000 non-seriously contaminated tails)

A reduced cutting power demand extends the life of the drill battery and results in reduced user fatigue.

How to adjust the tension screws

The cutter tension should be checked before first use.


1. Line the cutter teeth up behind each other so you can see a gap between the cutters.
2. Tighten the tension screws evenly to hand tight, then back off about an 1/8 to 1/4 turn.
3. The Tailwell cutters should just be able to be turned freely by finger grip only.

Maintenance during trimming

Every 30-50 tails, to ensure continued good performance, undertake some quick maintenance.

1. Look for any debris caught in the cutters (hair etc). If apparent, the cutters will need to be removed, cleaned and reassembled, then re-tensioned. (See section on Sharpening the cutters).
2. Check and if necessary, reset the cutter tension screws.
3. Line the cutter teeth up behind each other so you can see the gap between the two rows of cutters.
4. Tighten the three tension screws evenly to hand tight, then back off about an 1/8 to 1/4 turn.

Oil the cutters thoroughly using the Tailwell oil supplied.

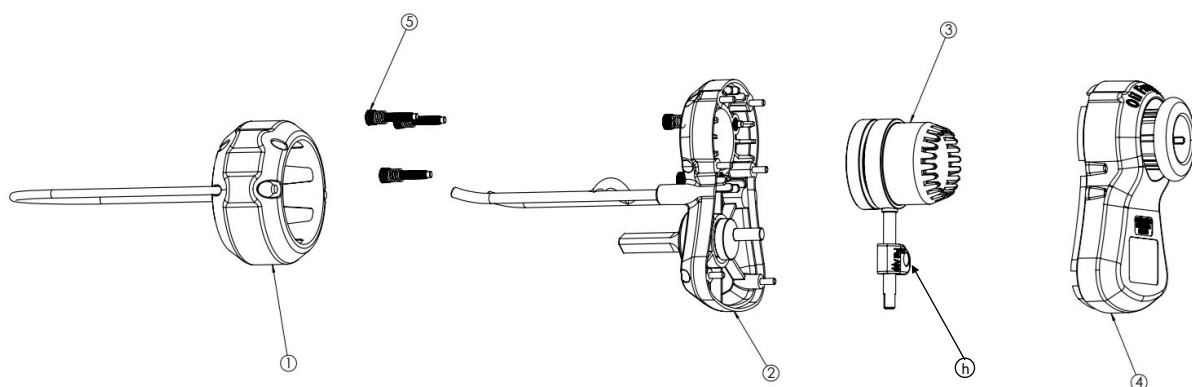

ITEM	CODE	DESCRIPTION
	TTT01B	TAILWELL ROTATOR BEARING (PR)
	TTT01D	TAILWELL TAIL TRIMMR LUBE 40ML
	TTT01E	TAILWELL TAIL TRIMMR LUBE 100ML
	TTT01F	TAILWELL HONING PASTE (ONLY FOR STANDARD HEAD)
3	TTT01G	TAILWELL STANDARD CUTTER SET
3	TTT01H	TAILWELL TITANIUM CUTTER SET
5	TTT01J	TAILWELL SCREW/SPRING SET (3)